


WIRELESS ANALOG DATA ACQUISITION SYSTEM WITH ANALOG INPUTS ($\pm 5V$ OR $\pm 10V$)





made in Germany


//APPLICATIONS
FEATURED VIDEO

-  [BeanDevice® AN-V Main presentation Video](#)
-  [BeanDevice® AN-V Configuration Video](#)
-  [BeanDevice® AN-V Wireless Range Video](#)

USER MANUAL

-  [BeanDevice® ProcessSensor user manual](#)

SELECTION GUIDE

-  [BeanDevice® ProcessSensor selection guide](#)

MECHANICAL DRAWING

-  [BeanDevice® AN-V drawing](#)

// MAIN FEATURES


Analog inputs $\pm 5V$ or $\pm 10V$
(4 channels)



Wireless transmission IEEE 802.15.4 with
antenna diversity



Integrated sensor power supply, software
configurable 4.5V to 20V



Integrated rechargeable Lithium-Ion
battery



Embedded data logger up to 1 million
data points

//EMBEDDED DATA LOGGER UP TO 1 MILLION DATA POINTS

The BeanDevice® AN-V integrates an embedded data logger, which can be used to log data when a Wireless Sensor Networks can not be easily deployed on your site. All the data acquisitions are stored on the embedded flash and then transmitted to the BeanGateway® whenever a Wireless Sensor Network is established.

The Datalogger function is compatible with all the data acquisition mode available on your BeanDevice® AN-V :

- LowDutyCycle Data Acquisition
- Survey
- Streaming packet

EXAMPLE : DATA ACQUISITION SYSTEM FOR TECHNICAL BUILDING MANAGEMENT

- The BeanDevice® AN-V is configured with its Datalogger feature. A standalone installation of the BeanDevice® AN-V will be done (mounted on the walls), without the necessity for any connection to the BeanGateway®.
- Once the sensors are connected, each data is recorded on the embedded flash.
- When needed a technician working on the site can send a request for a log transmission. Then the BeanDevice® AN-V starts sending all its logs. If all the logs are successfully transmitted to the BeanGateway®, the flash memory is erased and new logs will be recorded.



For further information about the Datalogger, please read the following technical note : [TN_RF_007 – “BeanDevice® DataLogger User Guide”](#)

// REMOTE CONFIGURATION & MONITORING
BeanScape® Basic

The **BeanScape®** application allows the user to view all the data measurements transmitted by the **BeanDevice® AN-V**. With the **OTAC** (Over-the-Air configuration) feature, the user can remotely configure the **BeanDevice® AN-V**.

SEVERAL DATA ACQUISITION MODES ARE AVAILABLE ON THE BEANDEVICE® AN-V :

- **Low Duty Cycle Data Acquisition mode (LDCDA)** : the data acquisition is immediately transmitted by radio. The transmission frequency can be configured from 1s to 24h.
- **Survey Mode** : the measured value is transmitted by radio whenever an alarm threshold (fixed by the user) is detected (4 alarms threshold levels High/Low). Meanwhile, the device sends frequently a beacon frame informing its current status.
- **Streaming Packet Mode** : All measured values are transmitted by packet within a continuous flow at 400 samples per second maximum.

BeanScape® Premium+ Add-on

The **BeanScape® Premium+** integrates an **OPC DA** server (Data Access). **OPC DA** is particularly well suited for real time measurement and data sharing. Each data/measurement can be associated to a tag or its attributes and shared with one or many **OPC** clients.



For further information about the different data acquisition modes:
[TN_RF_008 – “Data acquisition modes available on the BeanDevice®”](#)

//CONFIGURABLE SENSOR POWER SUPPLY


The sensor is directly powered by a high accuracy and adjustable DC/DC converter integrated inside the device. The excitation voltage is remotely configurable through the **BeanScape®** (4.5 to 20V).

Product Reference
BND-ANV-NCH-MR
N - Number of data acquisition channels:
4 : 4 channels

MR - Measurement Range
- 5 : $\pm 5V$ measurement range , - **10** : $\pm 10V$ measurement range


Example : BND-ANV-4CH-5 , **BeanDevice® AN-V with four channels , measurement range: $\pm 5V$**
Analog data acquisition block specifications

| | |
|--|--|
| Signal Conditioning | Analog low voltage measurement |
| Number of channels | 4 Channels |
| A/D Converter | 16 bits - SAR Architecture (Successive Approximation Register) with temperature compensation |
| Measurement range (analog polarity is configurable from the BeanScape®) | BND-ANV-NCH-5 - IEEE-BT: $\pm 5V$ (bipolar) or 0-10 V (unipolar) BND-ANV-NCH-10 - IEEE-BT: $\pm 10V$ (bipolar) or 0-20 V (unipolar) |
| Non-linearity error | ± 0.5 LSB |
| Measurement accuracy(@25°C) | < 0,1% when plugged on external power supply < 0,08% when operating on battery power |
| Sensor Connector | M12-5Pins coming with an IP rating IP67 Nema 6 |

Sensor wiring code (M12 Socket)
Caption
Pwr+ : sensor power supply (4.5 to 20 Volts)

Gnd : electrical ground

Sens+ : sensor signal + input

Sens- : Not used

Sensor Power Supply specifications

| | |
|---|--|
| Excitation voltage range | 4.5 Volts to 20Volts , configurable from the BeanScape® software |
| Excitation voltage accuracy on full scale range(@25°C) | $\pm 0.1\%$ |
| Maximum Output Power (@25°C) | 2 Watts |

Over-the-air configuration (OTAC) parameters

| | |
|---|---|
| Data Acquisition mode | <ul style="list-style-type: none"> • Low Duty Cycle Data Acquisition (LDCDA) Mode: 1s to 24 hour • Survey mode: 1s to 24 hour • Streaming Packet Mode: 400 SPS maximum |
| Sampling Rate (SPS = samples per second) | Minimum: 1 SPS Maximum: 400 SPS maximum on each channel |
| Alarm Threshold | 2 high levels alarms & 2 low levels alarms |
| Sensor power supply | 4.5 to 20 Volts |
| Analog Input polarity | Bipolar or Unipolar |
| Power Mode | Sleeping with Network Listening & Active |
| TX Power | 18 dBm |

RF Specifications

| | |
|--------------------------------|--|
| Wireless Protocol Stack | IEEE 802.15.4 (2006 version) |
| WSN Topology | Point-to-Point / Star |
| Data Rate | 250 Kbits/s |
| RF Characteristics | ISM 2.4GHz - 16 Channels |
| TX Power | 18 dBm |
| Receiver Sensitivity | -95.5 dBm to -104 dBm |
| Maximum Radio Range | 1 Km (L.O.S) |
| Antenna diversity | 2 omnidirectional N-Type antenna , gain of 2.2 dBi , IP67 Nema 6 |

Embedded Data Logger

| | |
|----------------------------------|--|
| Storage Capacity | up to 1 million data points |
| Wireless data downloading | 3 minutes to download the full memory (average time) |

Environmental and Mechanical

| | |
|------------------------------|---|
| Enclosure | Aluminium, Watertight IP65 – Fire Protection : ULV94/Getex Enclosure dimensions (without antenna) L x W x H : 146.05 mm x 65.5mm x 33.5 mm |
| Shock Resistance | 10g during 50ms |
| Operating Temperature | -20 °C to +65 °C |
| Norms | CE Labelling Directive R&TTE (Radio) ETSI EN 300 328 ROHS - Directive 2002/95/EC |

| Power Supply | |
|-----------------------------------|--|
| Integrated battery charger | Integrated Lithium-ion battery charger with high precision battery monitoring : <ul style="list-style-type: none"> · Overvoltage Protection · Battery Temperature monitoring · Current accumulation measurement |
| Current consumption @ 3,3V | <ul style="list-style-type: none"> · During data acquisition : 70mA to 130mA (depends on external sensor power supply) · During Radio transmission : 60 mA @ 0dBm · During sleeping: < 30 µA |
| External power supply | External power supply : +8v to +28v |
| Rechargeable battery | Lithium-Ion high density rechargeable battery capacity of 950 mAh |

| | Option(s) |
|--------------------------|---|
| Power-supply bloc | Wall plug-in, Switchmode power Supply 12V @ 1,25A with sealed M8 Plug (IP67 Nema 6) |

//GETTING STARTING WITH A WIRELESS SENSOR NETWORK

| DESCRIPTION | STARTERKIT REFERENCE |
|---|----------------------|
| Starterkit Wireless System acquisition BeanDevice AN-mV 1 x BeanGateway Ethernet (Indoor version), Ref. : BGTW-ETH-IND 1 x BeanDevice AN-V, Ref. : BND-AN-MV-4CH-IEEE 1 x Beanscape Basic, Ref. : BNSC_BASIC | SK_BND_ANV_4CH_IND |
| Starterkit Wireless System acquisition BeanDevice AN-mV 1 x BeanGateway Ethernet (Outdoor version), Ref. : BGTW-ETH-OUT 1 x BeanDevice AN-V, Ref. : BND-AN-MV-4CH-IEEE 1 x Beanscape Basic, Ref. : BNSC_BASIC | SK_BND_ANV_4CH_OUT |

The [BeanDevice® AN-V](#) operates only on our Wireless Sensor Networks, you will need the [BeanGateway®](#) and the [BeanScape®](#) for starting a wireless sensor networks.

Product specifications are subject to change without notice. Contact Beanair for latest specifications.



BeanDevice
AN- AN-V

BeanGateway
Indoor Version

BeanScope




OR



BeanGateway
Outdoor Version

//PRODUCT OVERVIEW

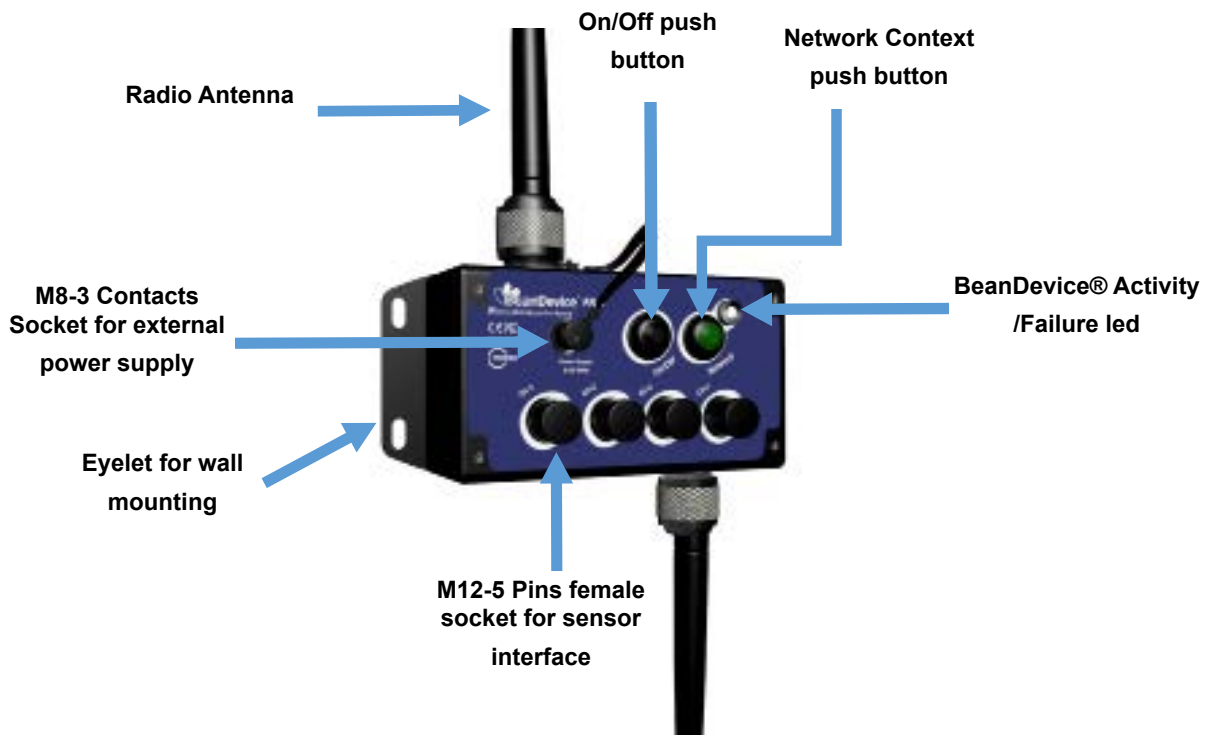


// PRODUCT OVERVIEW

Power Supply | Ref: M8-PWR-12V

- . Power Supply bloc 12V with M8-3Pins plug
- . Watertight - IP67


Molded Cable with M8 | Ref: CBL-M8-2M

- . 3POLE - MALE, PVC
- . Length : 2meters
- . Watertight - IP67


Omnidirectiona antenna 5dBi for outdoor use | Ref: HG_OMNI_5_OUT_DBI

- . Waterproof design
- . Outdoor use
- . Professional N-type design reduces stress
- . N-type, Male, Reverse Polarity,
- . VSWR < 2.0 / Length=95mm
- . Wind survival: up to 180Mph / Watertight IP65


N-Type cable (Male/Male) | Ref: CBL_ANT_XXM

- . length: 1 meter / 2 meters / 5 meters
- . Cable type: RF-5/H155


M12-5 Pins plug for sensor interface | Ref: M12-PL-SENSOR
 watertight IP67 - Material: Plastic ABS

M12-5 Pins plug for sensor interface | Ref: M12-AL-SENSOR
 watertight IP67 - Material: Aluminum case

**//CONTACT US**

FOR MORE INFORMATION :

sales@beanair.comVisit our website : **www.beanair.com**Visit our blog : **www.industrial-wsn.com**

OUR YOUTUBE CHANNEL :



Watch our featured videos on Youtube

VISIT OUR WEBSITES**VISIT US !**